

高速均質機 POLYTRON



PT 3100

處理量：0.1-3000 mL


- Powerful drive with 750 Watt
- Up to 28000 rpm and up to approx. 36 m/s tip speed
- Sound-proof to approx. 72 dB A
- Intelligent control with LED display for speed indication
- Soft-start, overload protection and speed stabilisation
- Safety quick coupling
- More than 20 different and interchangeable dispersing aggregates
- Connection for programmable RECO® control unit
- 3 different stand models




PT 6100

處理量：100 mL - 30 L

- Powerful 1600 watt drive
- Up to 24000 min⁻¹ and up to approx. 50 m/s tip speed
- Sound-proof to approx. 80 dB A
- Intelligent control with LED display for speed indication
- Soft-start, overload protection and speed stabilisation
- Safety quick-coupling
- More than 40 different and interchangeable dispersing aggregates
- Connection for programmable RECO® control unit

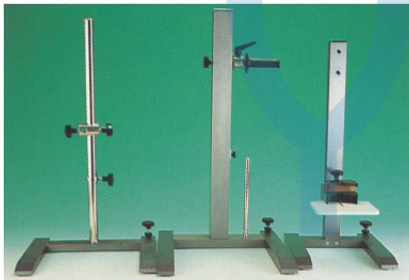

PT-ST 6003 PT-ST 6002 PT-ST3001

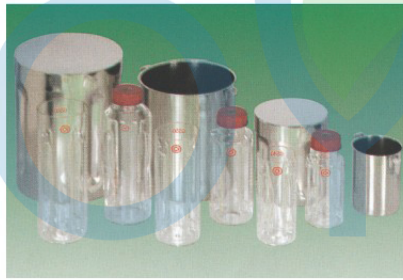

Dispersing Vessels : 350, 150, 500, 1000, 1300, 2000, 3500 mL



Control for speed, working time and max. temperature

處理量	2-250ml	10-2000 ml	100-3000 ml	200-4000 ml	200-5000 ml
PT3100	+++	+++	+++	++	-
PT6100	+	++	+++	+++	+++

Tip Diameter	12 mm	20 mm	30 mm	36 mm	40 mm
Adaptation	+++	++	++	++	++

+++ very well adapted ++ well adapted + limited adapted

PT6100另有直徑 45 mm (200-4000 mL), 50 mm (300-1000 mL)及 60 mm (1-30 L)